

## Flexible duct RE-Form® FE



### Uses

FE is a flexible duct to be used in existing ventilation and exhaust outlet ducts. (Swedish Type Approval Certificate No. 0699.)  
FE can also be used as a duct in ventilating units in smaller houses, industries etc. FE conforms to tightness class C.

### Design

The FE duct is flexible and made of corrugated, seamed aluminium plated steel band. FE is corrosion resistant, it is lightweight and easy to bend, which makes it easy to install.

### Max. temperature

+700°C

### Standard length

2 and 25 m (Ø63-160 mm)  
2 m (Ø200-315 mm)

### Bending radius

1 x Ø 63-160 mm  
2 x Ø200-315 mm

### Dimensions / Weight

Inner/Outer Ø mm	Weight kg/m
63/68	0,4
80/85	0,5
100/105	0,6
125/130	0,8
160/165	1
200/205	1,2
250/255	1,6
315/320	2

### When ordering, please state

Flexible duct

FE - 125

Product \_\_\_\_\_


Dimension \_\_\_\_\_

# Flexible duct


RE-Form® FE



## How to install

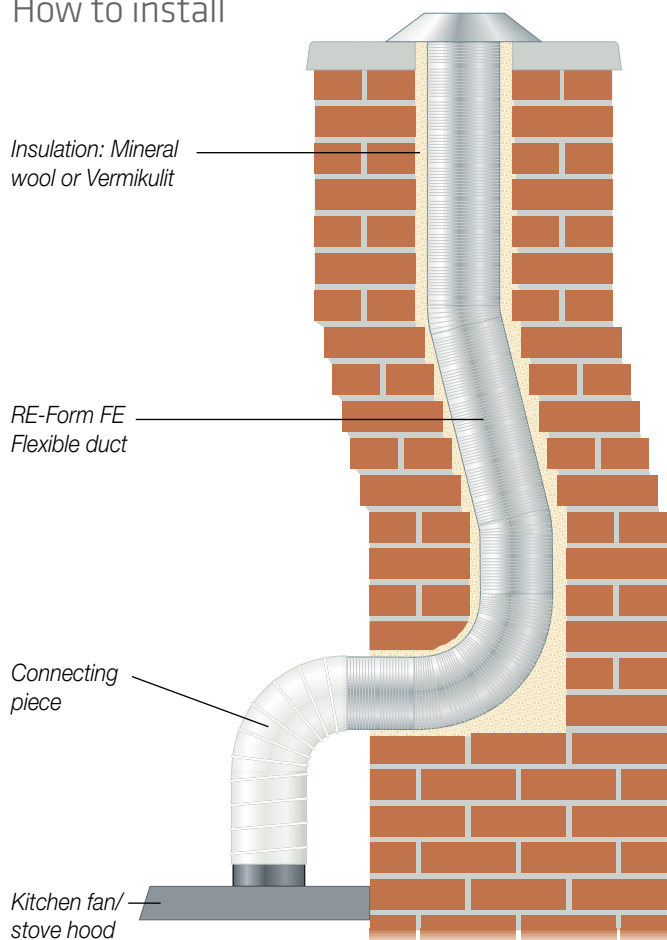

90° bend with type approved rubber gasket

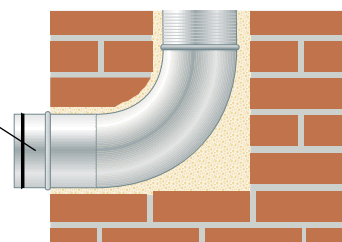

## Pressure drop diagram, straight ducts

